


WATER PUMPS

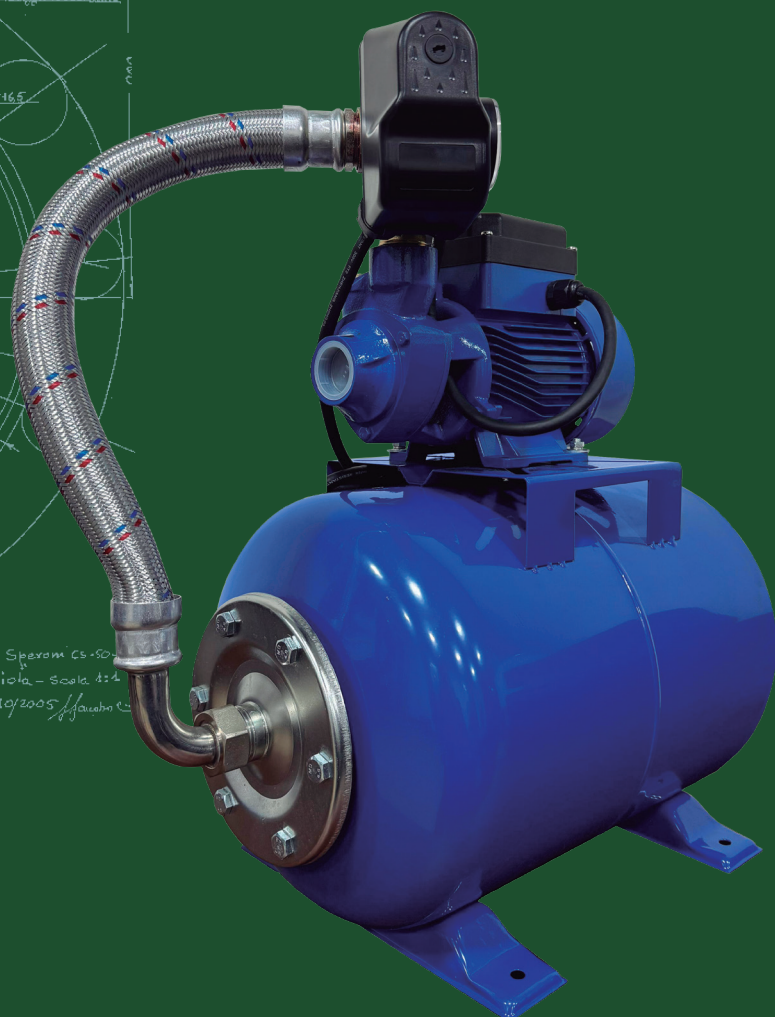

60 Hz

GENERAL DATA

Model Code	1
Operating conditions	1
Pump	1
Motor	1
Advantages & features	1
Material	2

TECHNICAL DATA

YDQ Performance curve	3
YDQ Overall & installation dimensions	3



YDQ SERIES

GENERAL DATA

60 HZ



MODEL CODE

YDQ T - 60

Power($\div 100$ HP)

Three phase motor
(Omitted for single-phase motor)

Product style

OPERATING CONDITIONS

- Liquid temperature up to 60°C.
- Ambient temperature up to 40°C.
- Total suction lift up to 9m.
- Continuous duty.
- pH: 6.5 to 8.5.

PUMP



- Pump Body: Cast iron/ Brass / Stainless steel.
- Impeller: Brass.
- Mechanical Seal: Carbon/Ceramic/Stainless Steel.
- Front cover: Cast iron with brass or stainless steel insert.

MOTOR

- Single phase: IE1, IE2/IE3.
- Motor housing: Aluminum.
- Insulation: Class B / Class F.
- Cooling: External ventilation.
- Heavy duty continuous work.
- Shaft: AISI304/AISI420/AISI1045.
- Protection: IPX4.

ADVANTAGES & FEATURES


- Small size, high pressure.
- Easy installation & maintenance.

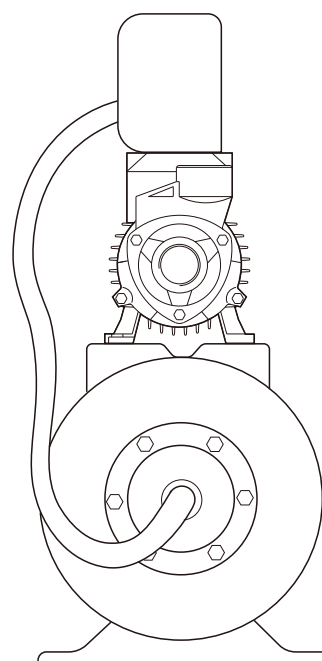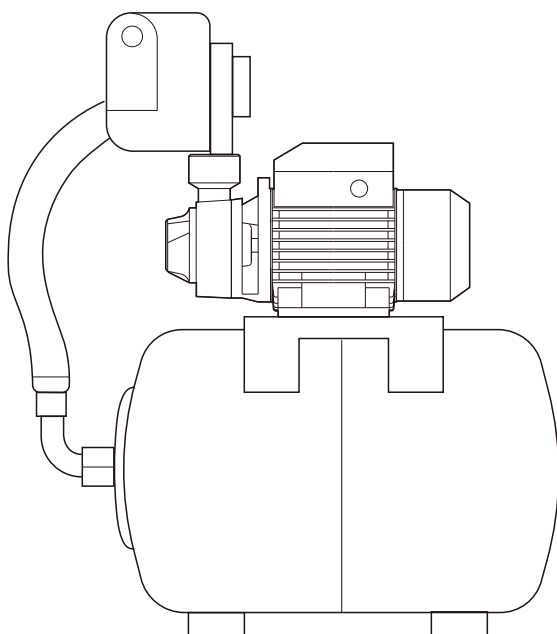

YDQ SERIES

GENERAL DATA
MATERIAL

60 HZ

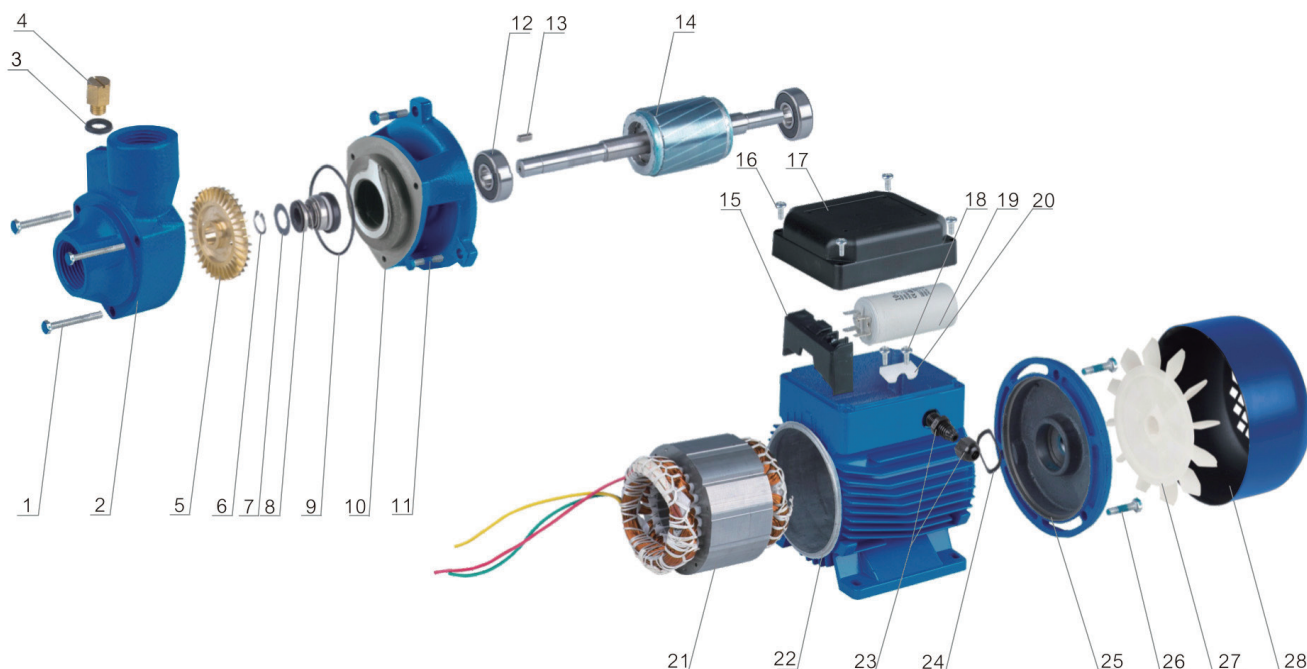


NO.	DESCRIPTION	NO.	DESCRIPTION
1	Pump body screw.	15	Terminal board.
2	Pump body.	16	Screw for terminal box.
3	“O” ring for filling plug.	17	Terminal box.
4	Filling plug.	18	Screw for cable presser.
5	Impeller.	19	Capacitor.
6	Circlip.	20	Cable presser.
7	Plain washer.	21	Stator with winding.
8	Mechanical seal.	22	Motor housing.
9	“O” ring for pump body.	23	Cable gland.
10	Motor front bracket.	24	Adjusting ring.
11	Screw for motor bracket.	25	Rear cover.
12	Bearing.	26	Rear cover screw.
13	Key.	27	Fan.
14	Shaft and rotor.	28	Fan cover.

YDQ SERIES

60 HZ

TECHNICAL DATA

PERFORMANCE CURVE

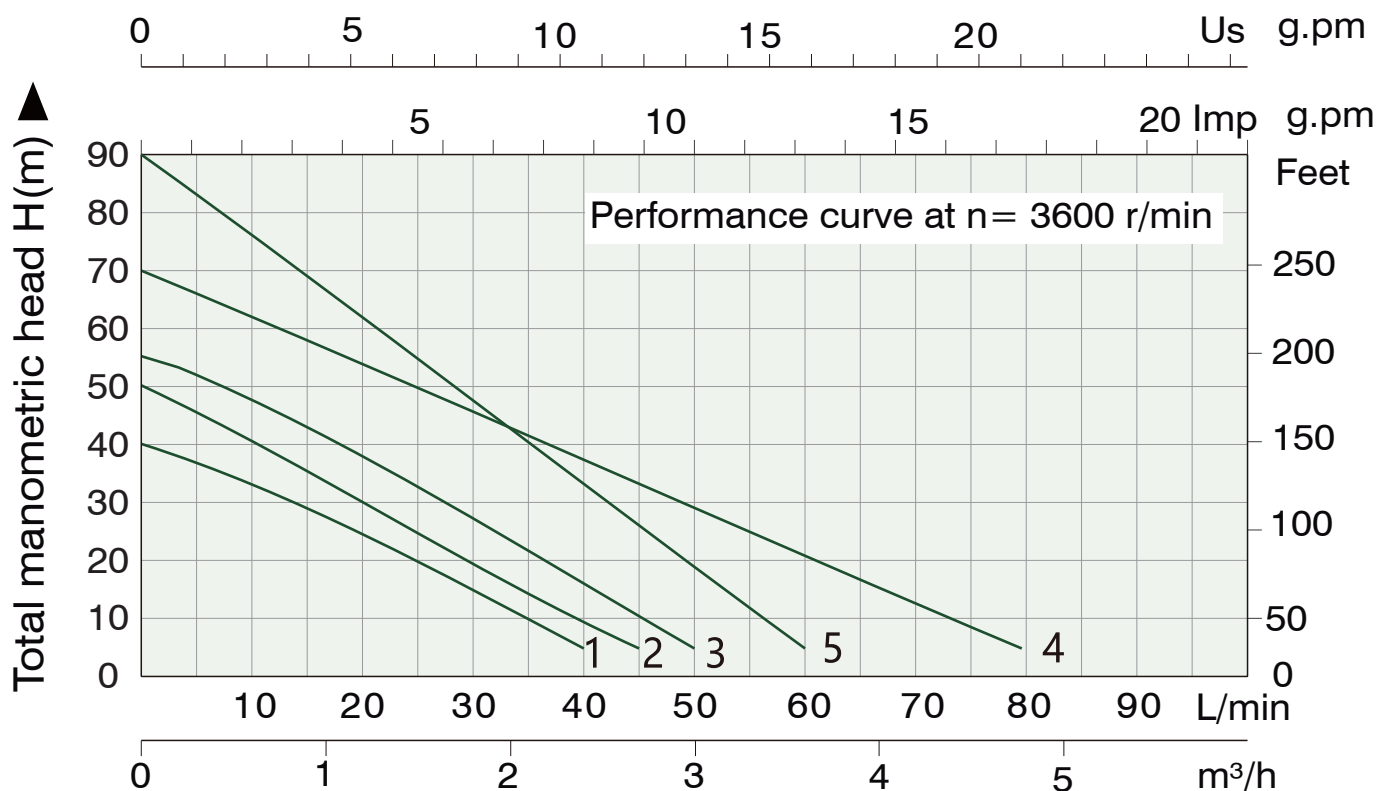


1. YDQ-60/B/ST 2.YDQ-70/B/ST 3.YDQ-80/B/ST 4.YDQ-90 5.YDQ-100

TECHNICAL DATA (220~240V/60Hz)

MODEL	SINGLE-PHASE MOTOR				n=3600 r/min			DIMENSIONS (mm)			
	INPUT MAX	OUTPUT POWER		CURRENT	Q.max	H.max	Suct.max	DNA		DNM	
		kW	HP					Inch	mm	Inch	mm
YDQ-60/ST/B	0.55	0.37	0.50	2.5	40	40	9	1"	25	1"	25
YDQ-70/ST/B	0.80	0.55	0.75	3.8	45	55		1"	25	1"	25
YDQ-80/ST/B	1.10	0.75	1.00	5.2	50	60		1"/1.5"	25/40	1"/1.5"	25/40
YDQ-90(1")	1.50	1.10	1.50	7.0	60	70		1"	25	1"	25
YDQ-100(1")	2.00	1.50	2.00	9.6	60	90		1"	25	1"	25
YDQ-90(1.5")	1.50	1.10	1.50	7.0	80	70		1.5"	40	1.5"	40

Other voltages and frequencies available on request.



OVERALL & INSTALLATION DIMENSIONS

MODEL	DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	I	J
YDQ-60	265	110	80	45	151	118	100	10	63	138
YDQ-70	305	122	90	50	181	136	112	10	71	150
YDQ-80	305	122	90	50	181	136	112	10	71	150
YDQ-90/ YDQ-100	380	138	100	68	182	180	162	10	80	156



WATER PUMPS

42024 Castelnovo di Sotto (Reggio Emilia) - Italy - Via S. Biagio, 59

Tel. +39.0522.487011 - Fax (Italy) +39.0522.487019 - Fax (World) +39.0522.683070

www.speroni.it • speroni@speroni.it